

## FINISHING TOPPER FOR TROUSERS

### FEATURES



### TOPPER-C

#### TOPPER-C

- With air-operated waistband and leg stretching device, for central steam and compressed air supplies.
- Side waistband stretching device.
- Height adjustable leg stretching carriage and leg clamps made of stainless steel.
- Built-in three phases fan. Air heating device.
- Electronic card for the setting of 9 ironing cycles in total.
- Ironing cycle controlling: steaming time, steam/air time, drying time.
- Three pressure regulators (for leg clamps, waistband stretcher and leg stretching carriage).
- Switch for the exclusion of the leg stretching carriage.
- Manual size indicator.
- Mechanical airflow regulator.
- It needs compressed air, 5 bar - 40 NI/min.
- Connection: 230/400V III 50Hz



TECHNICAL DATA	UNIT.	TOPPER-C
<b>GENERAL DETAILS</b>		
Boiler	-	No
Compressor	-	-
Group of Iron	-	-
Steam gun	-	-
<b>POWER</b>		
Vacuum Motor	HP	-
Pump Motor	HP	-
Compressor motor (Mod. with option)	HP	-
Boiler Heater (Mod. with option)	kW	-
Fan motor	HP	1-1,5
<b>CONNECTIONS</b>		
Ø Water inlet	BSP	-
Ø Steam inlet	BSP	3/8"
Ø Condensate outlet	BSP	3/8"
Steam pressure	BAR	5
Steam Consumption	Kg/h	15-20
Ø Air inlet	BSP	1/4"
Ø Air pressure	BAR	5
Ø Air Consumption	NI/m	40
<b>DIMENSIONS / PACKING DIMENSIONS</b>		
Width / Width	mm	1.115/1.210
Depth / Depth	mm	630/780
Height / Height	mm	1.950/2.100
Net weight / Gross weight	kg	119/175
Volume	m <sup>3</sup>	1,37/1,98
<b>OTHERS</b>		
Voltage	Hz	230/400V III 50
Sound level	dB	70

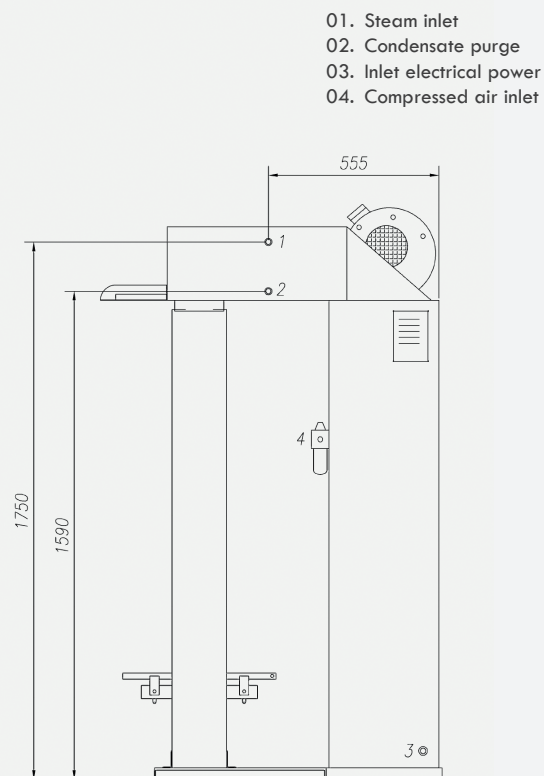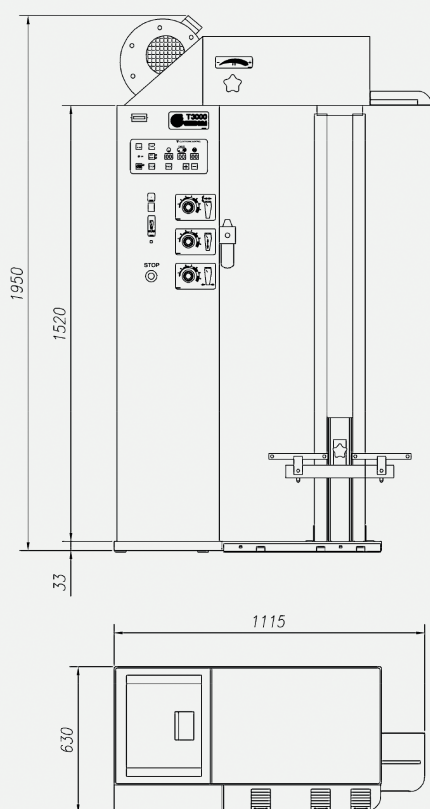

- 01. Steam inlet
- 02. Condensate purge
- 03. Inlet electrical power
- 04. Compressed air inlet